

Technical Datasheet


Pneumatic / Manual Actuator
NF26030



Pneumatic / Manual Actuator • Inertech

designed for use with

FSL Inert Clean Agent Gaseous Suppression Systems

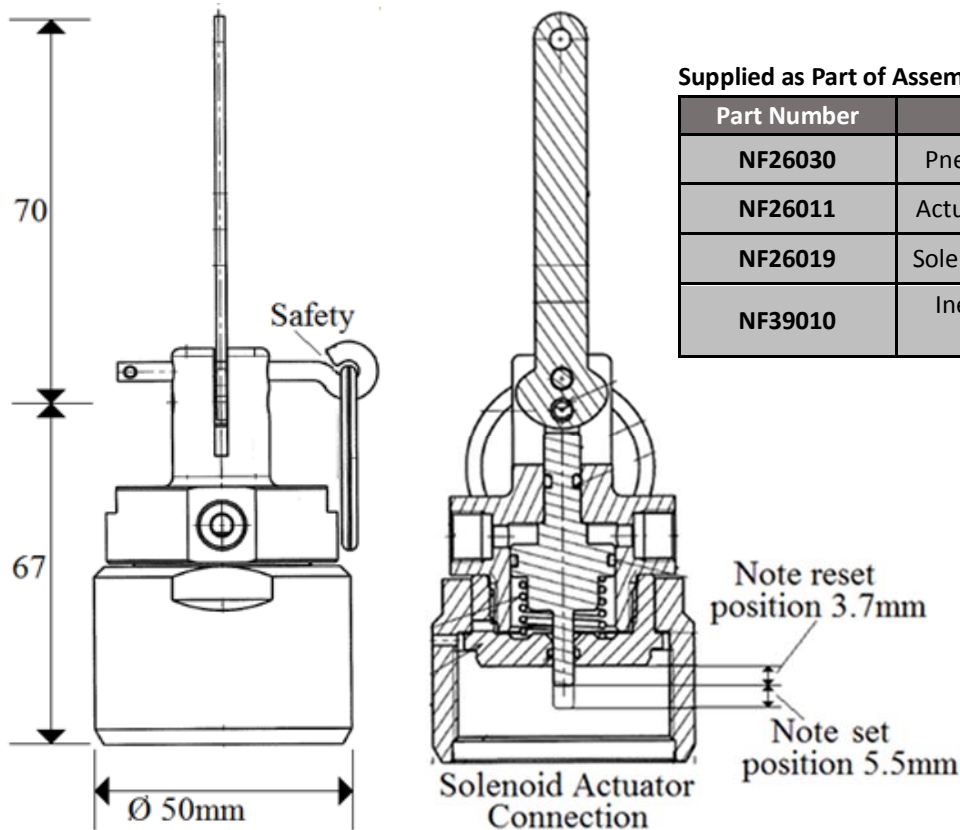

Supplied as Part of Assembly NF36011A

| Part Number | Description | Qty |
|-------------|--|-----|
| NF26030 | Pneumatic/Manual Actuator | 1 |
| NF26011 | Actuator inc. plug + emf diode | 1 |
| NF26019 | Solenoid Acutator – Reset Tool | 1 |
| NF39010 | Inertech – Manual Release Label Foamex | 1 |

- Manual Actuation Force <150N
- Working Temperature -20°C to 50°C
- Minimum actuation pressure 16 Bar
- Connect the tripping mechanism to the valve using the M42 x 1.5 connecting thread with a torque of 50+0/-15 Nm. Screw fully down
- Connect the Pilot line using the G1/8" with PTFE tape
- To use only in combination with a solenoid actuator
- Refer to Inertech Manual before assembling to system